

FEATURES:

- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.
- Available Non-RoHS (standard) or RoHS compliant (add PBF suffix).

MAXIMUM RATINGS

Characteristics	Symbol	Ratings
Junction and storage temperature:	T_J, T_{STG}	-65° to +175°C
DC power dissipation @ $T_A = 50^\circ\text{C}$: Derate above 50°C:	P_D	500mW @ 50°C 4mW/°C
Forward voltage @ 200mA	V_F	1.1V

ELECTRICAL CHARACTERISTICS

Part number ⁽¹⁾	Nominal zener voltage	Zener test current	Maximum zener impedance B-C-D Suffix	Maximum reverse leakage current			B-C-D suffix maximum DC zener current	B-C-D suffix maximum noise density @ $I_Z = 250\mu\text{A}$	Regulation factor	Low V_Z current
	$V_Z @ I_{ZT}$ ⁽²⁾	I_{ZT}	$Z_{ZT} @ I_{ZT}$ ⁽³⁾	I_R ⁽⁴⁾	$V_R = \text{Volts}$		I_{ZM}	N_D	ΔV_Z ⁽⁵⁾	I_{ZL}
	Volts	mAdc	OHMS	μAdc	Non & A-Suffix	B-C-D Suffix	mAdc	$\mu\text{V}/\sqrt{\text{HZ}}$	VOLTS	mAdc
1N5518BUR	3.3	20.0	26	5.00	0.90	1.0	115	0.5	0.90	2.00
1N5519BUR	3.6	20.0	24	3.00	0.90	1.0	105	0.5	0.90	2.00
1N5520BUR	3.9	20.0	22	1.00	0.90	1.0	98	0.5	0.85	2.00
1N5521BUR	4.3	20.0	18	3.00	1.00	1.5	88	0.5	0.75	2.00
1N5522BUR	4.7	10.0	22	2.00	1.50	2.0	81	0.5	0.60	1.00
1N5523BUR	5.1	5.0	26	2.00	2.00	2.5	75	0.5	0.65	0.25
1N5524BUR	5.6	3.0	30	2.00	3.00	3.5	68	1.0	0.30	0.25
1N5525BUR	6.2	1.0	30	1.00	4.50	5.0	61	1.0	0.20	0.01
1N5526BUR	6.8	1.0	30	1.00	5.50	6.2	56	1.0	0.10	0.01
1N5527BUR	7.5	1.0	35	0.50	6.00	6.8	51	2.0	0.05	0.01
1N5528BUR	8.2	1.0	40	0.50	6.50	7.5	46	4.0	0.05	0.01
1N5529BUR	9.1	1.0	45	0.10	7.00	8.2	42	4.0	0.05	0.01
1N5530BUR	10.0	1.0	60	0.05	8.00	9.1	38	4.0	0.10	0.01
1N5531BUR	11.0	1.0	80	0.05	9.00	9.9	35	5.0	0.20	0.01
1N5532BUR	12.0	1.0	90	0.05	9.50	10.8	32	10.0	0.20	0.01
1N5533BUR	13.0	1.0	90	0.01	10.50	11.7	29	15.0	0.20	0.01
1N5534BUR	14.0	1.0	100	0.01	11.50	12.6	27	20.0	0.20	0.01
1N5535BUR	15.0	1.0	100	0.01	12.50	13.5	25	20.0	0.20	0.01
1N5536BUR	16.0	1.0	100	0.01	13.00	14.4	24	20.0	0.20	0.01
1N5537BUR	17.0	1.0	100	0.01	14.00	15.3	22	20.0	0.20	0.01
1N5538BUR	18.0	1.0	100	0.01	15.00	16.2	21	20.0	0.20	0.01
1N5539BUR	19.0	1.0	100	0.01	16.00	17.1	20	20.0	0.20	0.01
1N5540BUR	20.0	1.0	100	0.01	17.00	18.0	19	20.0	0.20	0.01
1N5541BUR	22.0	1.0	100	0.01	18.00	19.8	17	20.0	0.25	0.01
1N5542BUR	24.0	1.0	100	0.01	20.00	21.6	16	20.0	0.30	0.01
1N5543BUR	25.0	1.0	100	0.01	21.00	22.4	15	20.0	0.35	0.01

Part number ⁽¹⁾	Nominal zener voltage	Zener test current	Maximum zener impedance B-C-D Suffix	Maximum reverse leakage current		B-C-D suffix maximum DC zener current	B-C-D suffix maximum noise density @ $I_Z = 250\mu A$	Regulation factor	Low V_Z current	
	$V_Z @ I_{ZT}$ (2)	I_{ZT}	$Z_{ZT} @ I_{ZT}$ ⁽³⁾	I_R ⁽⁴⁾	$V_R = \text{Volts}$		I_{ZM}	N_D	ΔV_Z ⁽⁵⁾	I_{ZL}
	Volts	mAdc	OHMS	μAdc	Non & A-Suffix	B-C-D Suffix	mAdc	$\mu\text{V}/\sqrt{\text{HZ}}$	VOLTS	mAdc
1N5544BUR	28.0	1.0	100	0.01	23.00	25.2	14	20.0	0.40	0.01
1N5545BUR	30.0	1.0	100	0.01	24.00	27.0	13	20.0	0.45	0.01
1N5546BUR	33.0	1.0	100	0.01	28.00	29.7	12	20.0	0.50	0.01

Note 1: No Suffix type numbers are $\pm 20\%$ with guaranteed limits for only, V_Z , I_R , and V_F . Units with "A" suffix are $\pm 10\%$ with guaranteed limits for V_Z , I_R , and V_F . Units with guaranteed limits for all six parameters are indicated by "B" suffix for $\pm 5.0\%$, "C" suffix for $\pm 2\%$ and "D" suffix for $\pm 1.0\%$.

Note 2: Zener voltage is measured with the device junction in thermal equilibrium at an ambient temperature of $25^\circ\text{C} \pm 3^\circ\text{C}$.


Note 3: Zener impedance is derived by superimposing on I_{ZT} a 60 Hz ms a.c. current equal to 10% of I_{ZT} .

Note 4: Reverse leakage currents are measured at V_R as shown on the table.

Note 5: ΔV_Z is the maximum difference between $V_Z @ I_{ZT}$ and $V_Z @ I_{ZL}$ measured with the device junction in thermal equilibrium at the ambient temperature of $+25^\circ\text{C} \pm 3^\circ\text{C}$.

MECHANICAL CHARACTERISTICS

Case:	SOD-80
Marking:	Body Painted, Alpha Numeric
Polarity:	Cathode Band

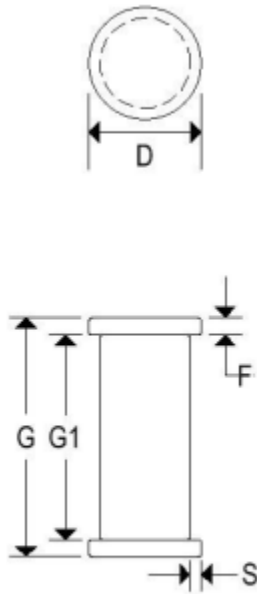

	SOD-80			
	Inches		Millimeters	
	Min	Max	Min	Max
D	0.055	0.067	1.397	1.702
F	-	0.022	-	0.559
G	0.130	0.146	3.302	3.708
G1	0.100 REF		2.540 REF	
S	0.001	-	0.025	-