

FR201G-FR207G

FAST RECOVERY RECTIFIERS

FEATURES

- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.
- Available as non-RoHS (Sn/Pb plating), standard, and as RoHS by adding "-PBF" suffix.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristics	Symbol	FR							Units
		201G	202G	203G	204G	205G	206G	207G	
Maximum Forward Rectified Current (Figure 2)	I _O	2.0							A
Maximum Forward Surge Current	I _{FSM}	70							A
Maximum Reverse Current V _R = V _{RRM} , T _J = 25°C V _R = V _{RRM} , T _J = 125°C	I _R	5.0 150							μA
Thermal Resistance, Junction to Ambient	R _{θJA}	50							°C/W
Typical Junction Capacitance f = 1MHz and applied 4V DC Reverse Voltage	C _J	40							pF
Storage Temperature Range	T _{STG}	-65 to +175							°C
Operating Temperature Range	T _J	-55 to +125							°C
Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Continuous Reverse Voltage	V _R	50	100	200	400	600	800	1000	V
Maximum Forward Voltage @ I _F = 2.0A	V _F	1.3	1.3	1.3	1.3	1.3	1.3	1.3	V
Maximum Reverse Recovery Time ⁽²⁾	t _{rr}	150	150	150	150	250	500	500	ns

Note 1: Thermal resistance from junction to ambient and from junction to lead length 0.375" PCB mounted.


Note 2: Reverse recovery time test condition, I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A

FR201G-FR207G

FAST RECOVERY RECTIFIERS

MECHANICAL CHARACTERISTICS

Case:	DO-15
Marking:	Alpha-numeric
Polarity:	Cathode band

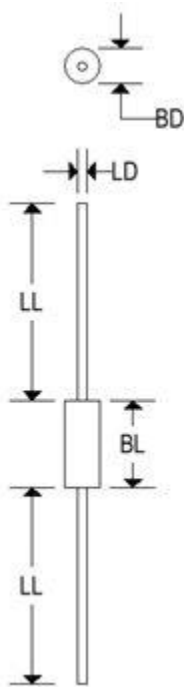

	DO-15			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	0.100	0.140	2.540	3.556
BL	0.200	0.300	5.080	7.620
LD	0.028	0.032	0.711	0.813
LL	1.000	-	25.400	-

FR201G-FR207G

FAST RECOVERY RECTIFIERS

FIG.1-TYPICAL FORWARD CHARACTERISTICS

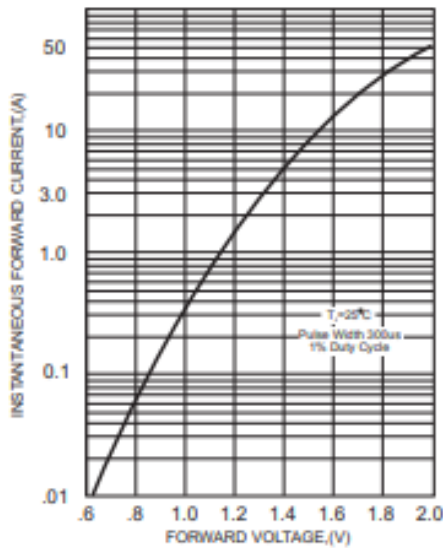


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

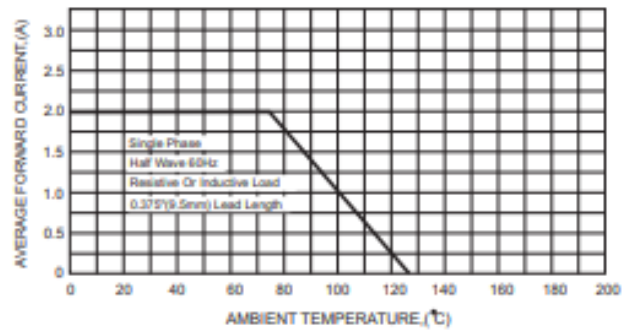


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


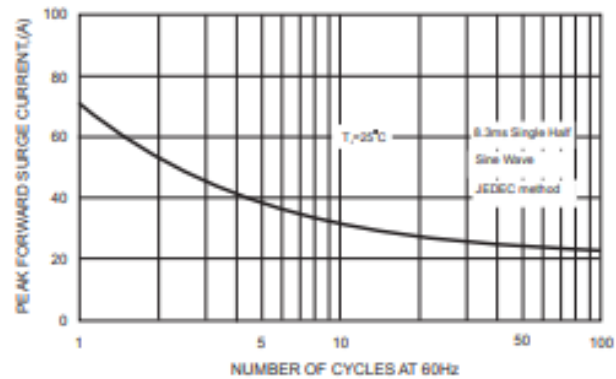


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

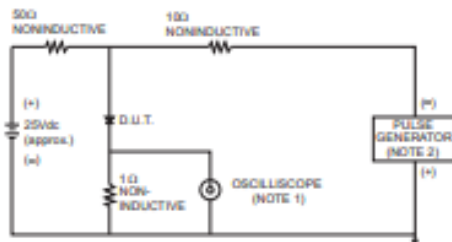

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm, 22pF.
2. Rise Time= 10ns max., Source Impedance= 50 ohms.




FIG.5-TYPICAL JUNCTION CAPACITANCE

